

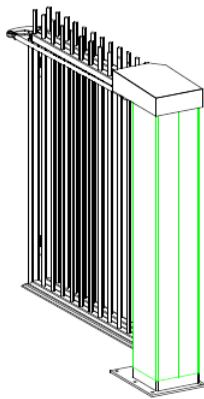
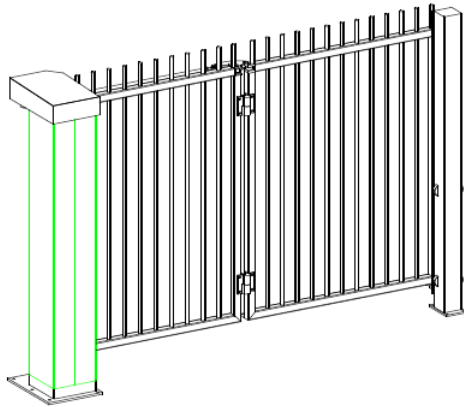



Technical specifications **Bavak Speedgate B-trackless**



Single gate installation
Two gates can be installed facing each other without a centre post to provide a single gate up to 10m wide.

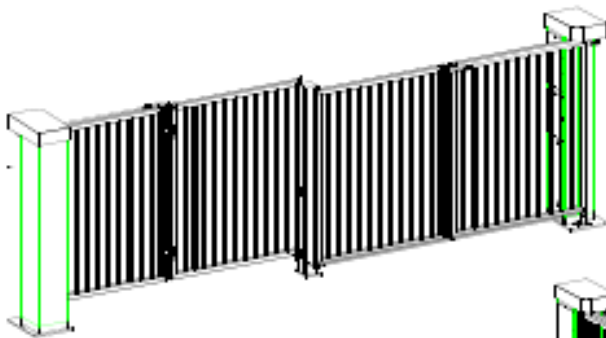

Two gate installation for individual lane control with centre post

Dimensions:

Clear opening between columns
Height: 2.000 – 3.000mm (7'- 10')
Depth: 2.500 – 5000mm (8'- 16')
Mounting depth: Surface mount

Construction:

2 Panels RHS profile 60 x 60mm and steel tube of Ø 80mm, 2 x posts
Drive unit within a bespoke design hanging post assembly. Closing post.

Surface treatment:

Sand blasted SA 2½ - 3, Zinc metalizing, 30 µm, Powder coating, Drive unit: DTM coating

Drive:

Electro mechanical drive unit with brake/locking.
Emergency opening via release handle in gate post.

Control unit:

Integrated into the gate post, accessible through the inspection hatch. Feig-FUZ controller unit with integrated safety loop amplifier. Control and wiring terminal strip are finished in a waterproof junction box, IP66.

Locking of gate panels:

Mechanical via link arm and motor brake

Safety:

2 photocells between the columns, class 3; 4 vertical safety edges at the front of the 2 inner wings, 4 horizontal safety edges at the lower beams of the panels, Vehicle detection loops, Compliant with the safety regulations EN 13241-1.

Features:

Bolts, galvanized (not in colour), Network or internet connection, Icons; Optional: Extra photocell between the static and moving parts at distances < 500mm, led lights integrated in the columns, orientation lights in the columns, Cabling, Access Control Systems.